




**WINCH
MOUNT KIT
For POLARIS ATVs**

OWNER'S MANUAL

MODEL NUMBER: 25-3260

**CUSTOMER MUST RECEIVE A COPY OF THIS
OWNER'S MANUAL AT TIME OF SALE**

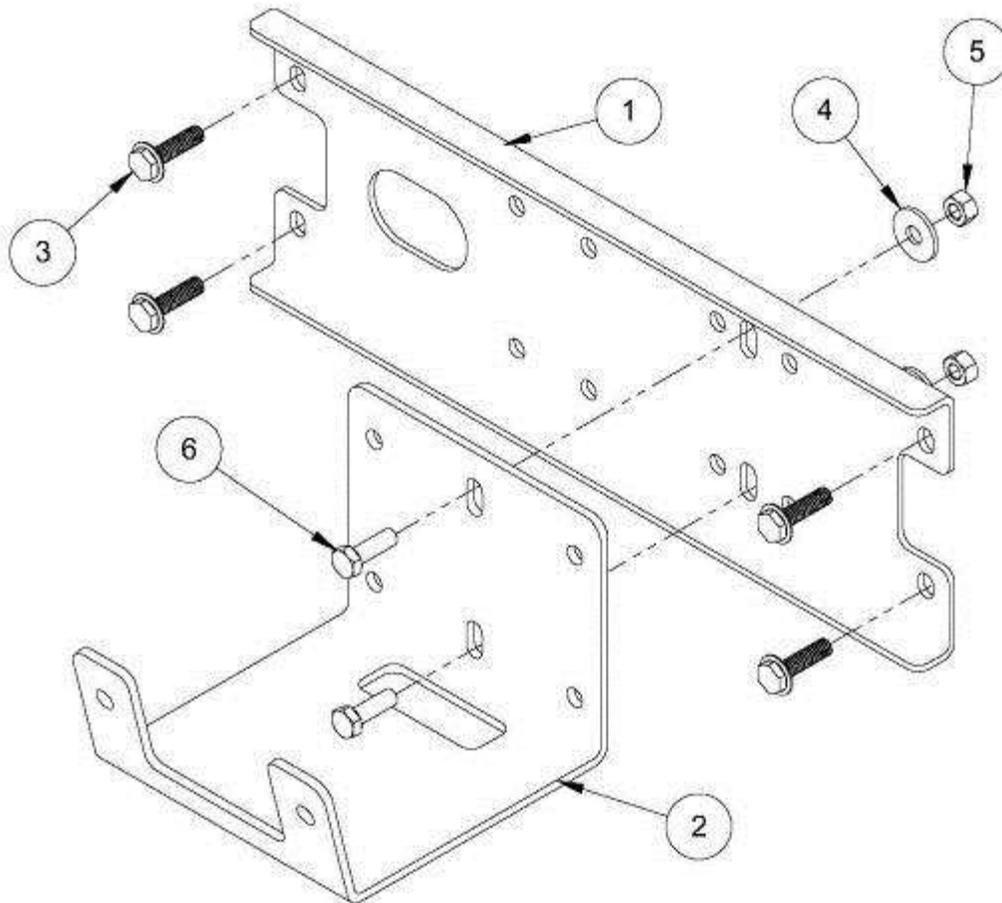

Model Number 25-3260 Parts List

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	CYC5524	Winch Mount Plate
2	1	CYC5522	Winch Adapter Plate
3	4	PUR3045	8mm x 30mm Self Tapping Bolt
4	2	PUR3087	Flat Washer 8mm
5	2	PUR3068	Nylon Lock Nut M8
6	2	PUR3012	Metric Bolt 8 x 25mm

Hardware package CYC0019

**THIS WINCH MOUNTING KIT CAN BE USED TO MOUNT
CYCLE COUNTRY 1500/2500 WINCHES OR WARN
15RT/15XT/25RT/25XT/A2500/3000 WINCHES.**

All directions referring to right and left are when the rider is sitting on the machine. Please Note: The cable clamp, roller hawse, and cable stop are included with the winch.


**MODEL NUMBER 25-3260
WINCH MOUNT INSTALLATION INSTRUCTIONS**

Assemble the Winch to Winch Mount Plate, Winch Adapter Plate and Roller Hawse Mount Plate on a bench prior to installing on ATV.


General Winch and Mount Assembly:

The winch cable must be configured to run out the top of the winch spool. If yours is pre-configured to run out the side of the winch spool, you must change it to route out the top of the winch.

1. Begin by setting the winch mount plate (Item 1) on a bench and orient the wiring hole to the motor end of your specific winch. (See drawing below for proper configuration). The plate is reversible: Position's below are from the rider's perspective, when sitting on the ATV.

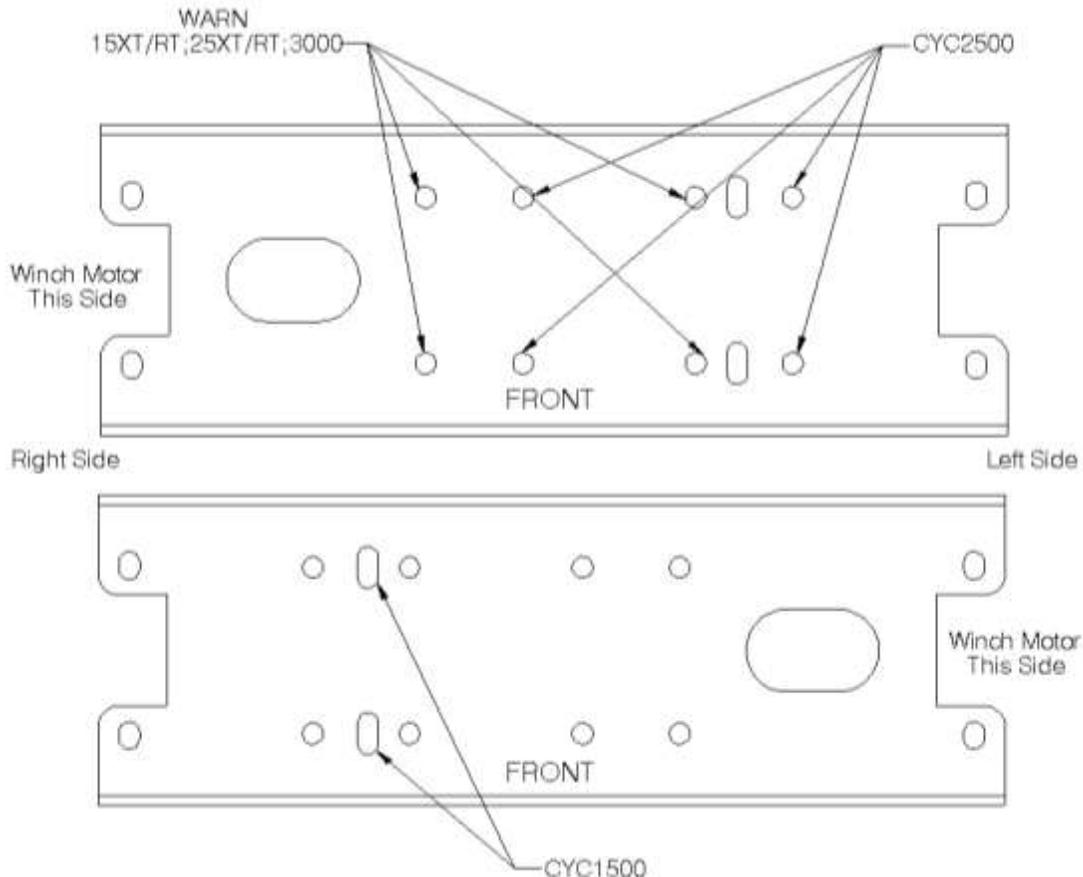

2. Install the two M8 x 25mm carriage bolts loosely into place on the winch adapter plate (Item 2) with flatwashers and nylock nuts as shown on the parts page. (These bolts need to be inserted into place now, because you may not be able to after the winch is installed.)
3. Place the winch adapter plate in position onto the winch mount plate, over the holes designated for your winch as shown in drawing on previous page. Place your winch into place and insert bolts from the back side of the winch mount plate assembly.
See picture below.

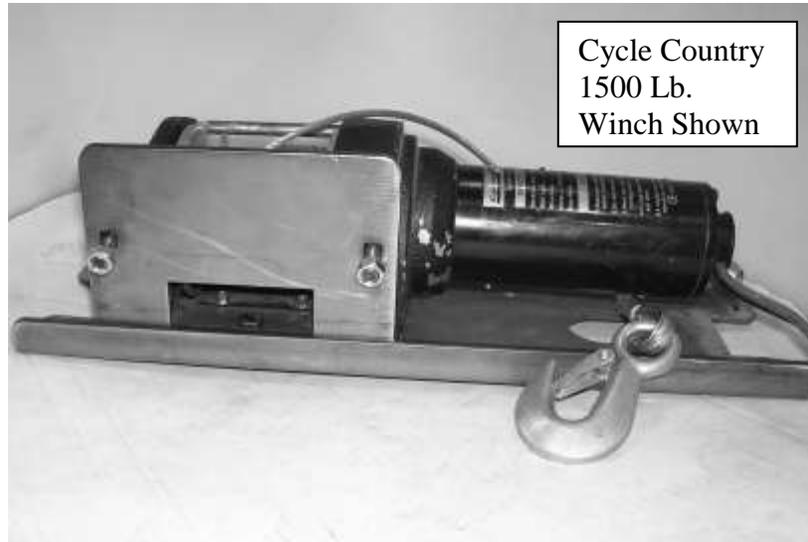

CYCLE COUNTRY 1500 Winch

Use the included two 5/16" x 1" bolts, flatwashers and nylock nuts and insert from the back side of winch mount plate (#1), through the winch adaptor plate and winch.

CYCLE COUNTRY 2500 and WARN 15RT/XT; 25RT/XT & 3000 Winches

Use the mounting bolts that came with your winch and insert from the back side of winch mount plate (Item1), through the winch adaptor plate (Item 2) and into winch. Position the winch so that it is straight on the winch mount plate and tighten bolts. If your winch comes with a roller hawse mount plate, it will not be used with this installation.

4. Install the roller hawse mount plate (Item 3) onto the winch adaptor plate (Item 2) after removing the nylock nuts from the carriage bolts installed earlier. Loosely attach with flatwashers and nylock nuts. Allow the roller hawse mount plate to slide down until it makes contact with the top of the winch housing, making sure that it remains straight across top and side edges while still making good contact on both sides of the winch housing, closest to the cable barrel. (See photo's on next page)
Tighten all hardware. GO TO ROLLER HAWSE INSTRUCTIONS


Install Roller Hawse Assembly

Remove one of the long rollers and the two side rollers and feed the winch cable through the roller hawse. Reinstall the rollers and be sure rollers move freely.


Attach the roller hawse to the roller hawse mount plate using the bolts and nylock nuts provided with the winch. **Tighten all hardware.**



2 Bolt Mount
Pattern Winch
Shown

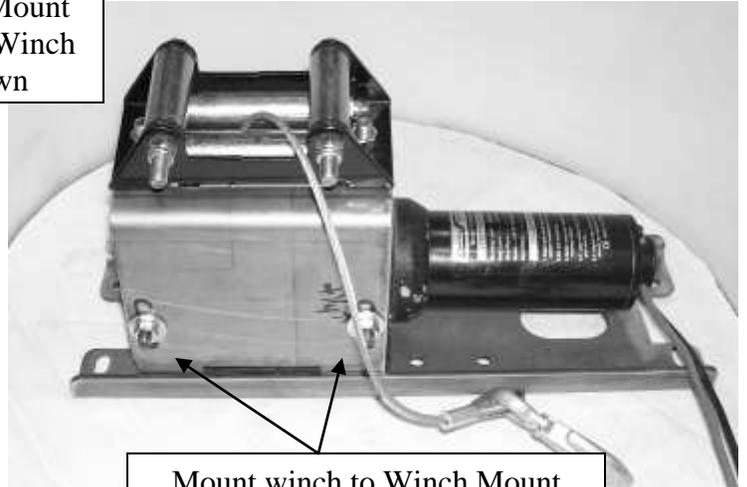


Mount winch to Winch Mount
Plate and Roller Fairlead to
Winch Adapter Plate

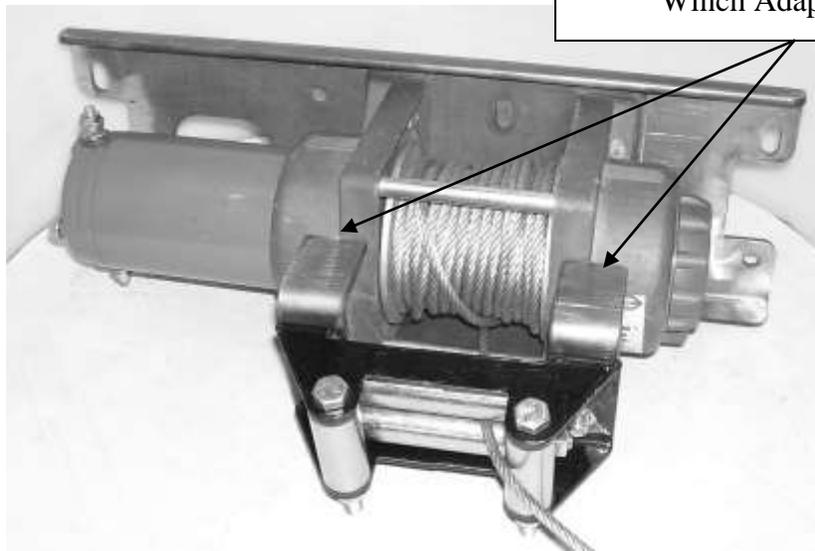


Installation of Winch Assembly:


5. Disconnect the headlight wiring harness from the bumper headlights.
6. Remove the front plastic “Polaris” shield on the front of your ATV by pushing in at the bottom and pulling up. This cover will no longer be used after installing a winch.
7. Remove the front bumper by removing the four 5/16” Bolts on the front. Set bumper aside for now. (Note: If installing on a Polaris Sportsman X2 500 or X2 800, there will be an existing plate installed, remove this plate and discard.)
8. It may be beneficial to run your wiring for your winch at this time. After the winch is in place, there will be limited access to the area behind where your winch is to be installed without removing other access panels. See your winch’s installation instructions for the wiring of your winch. Some winches have the wiring harness already connected to the winch and wiring your winch may not be possible until it is installed. Again, see your winch’s owners/installation manual for instructions.
9. Pre-start the four M8 self-tapping bolts into holes shown below and then remove them. You will only need to run them in far enough to start the new grooves for the bolts. This will aid in installation of the winch assembly.

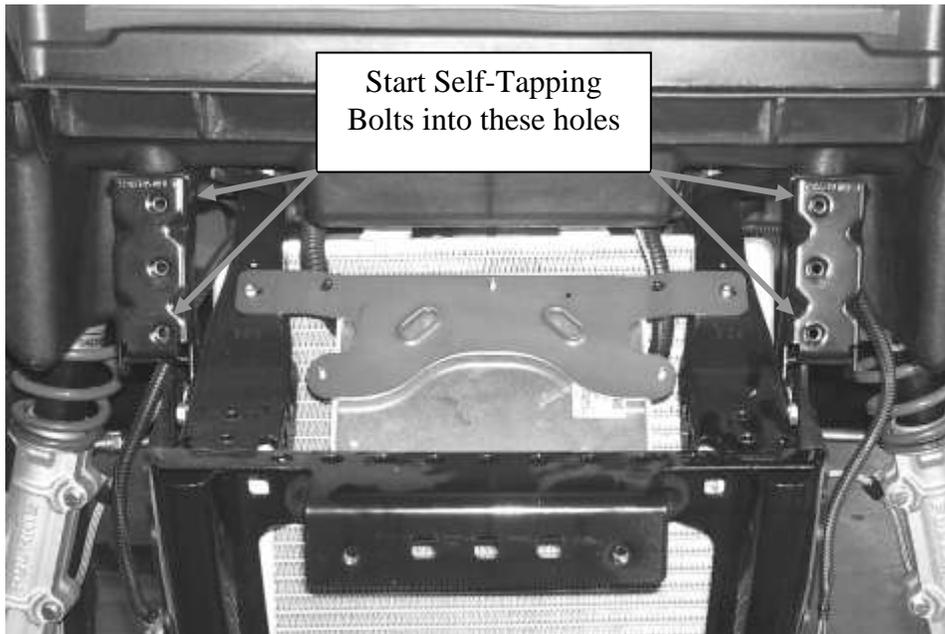

10. Route any wires through the wire access hole of the winch mount plate before installing winch assembly. Set the winch assembly into place on the ATV and install the four self-tapping bolts.

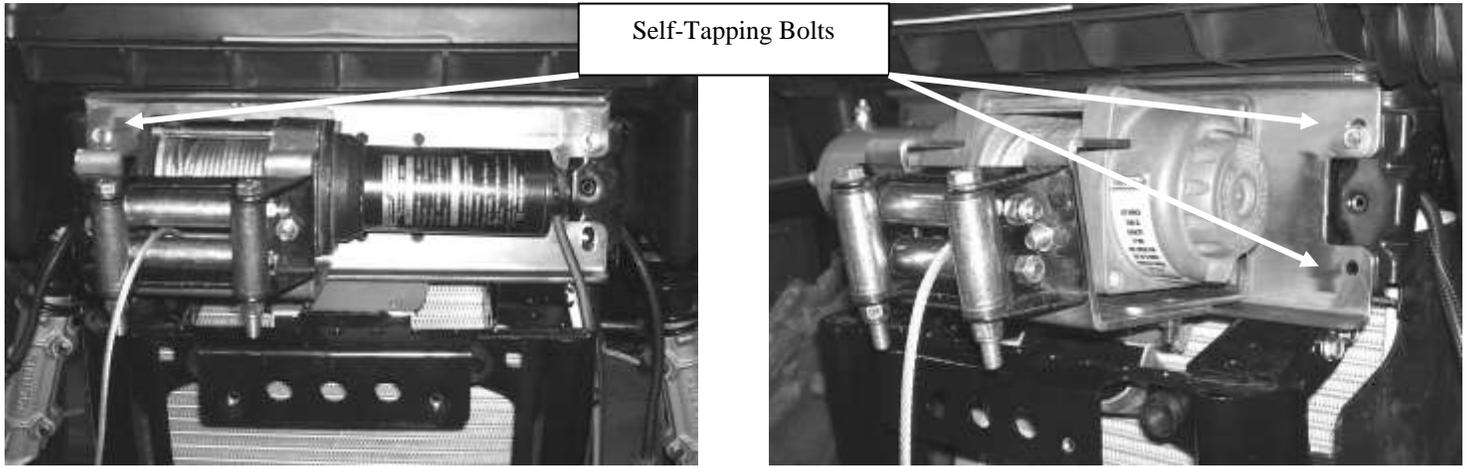

11. Re-install front bumper and re-attach headlight wiring harness.

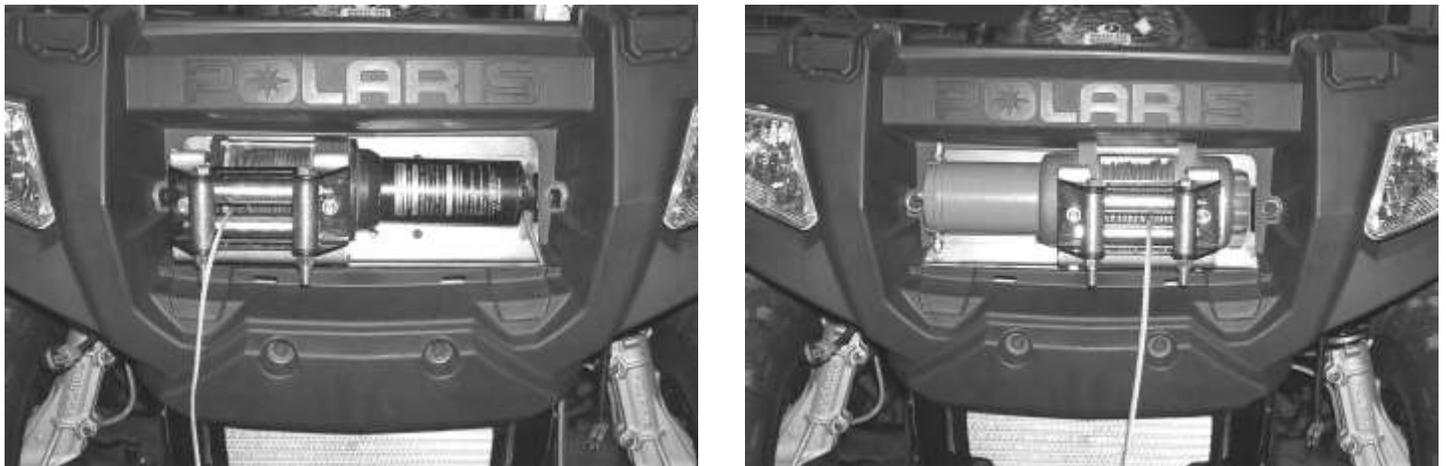

See Winch Wiring Instructions supplied with the Winch for proper installation.



One Year Limited Warranty

For the period of one (1) year from the purchase date, Cycle Country (a Kolpin Powersports Brand) will replace for the original purchaser, free of charge, any part or parts found upon examination by Cycle Country to be defective in material, workmanship, or both.

All transportation costs incurred submitting product to Cycle Country for warranty consideration must be borne by the purchaser. If Cycle Country determines that the product must be returned to the factory for credit, please call 1-800-841-2222 for a Return Merchandise Authorization (RMA) number and shipping instructions.

This warranty does not apply to parts that have been damaged by accident, alteration, abuse, improper maintenance, normal wear, or other causes beyond the manufacturer's control. In order to protect you and your ATV, certain parts of the plow system and/or hardware are designed to fail when the equipment is over-stressed.

Peripheral products such as engines, electric motors, and actuators may carry an original manufacturer's warranty. Please call Cycle Country for more information.

Cycle Country

A Kolpin Powersports Brand

205 N Depot St.

PO Box 107

Fox Lake, WI 53933

Service: 1-800-841-2222

Fax: 1-800-245-7569

Email: ccac@cyclecountry.com

Web: www.cyclecountry.com